



NEOTECH

GC020040SF30

CIRCULATOR


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	2	-	4	GHz
Isolation	18	-	-	dB
Insertion Loss	-	-	0.5	dB
VSWR	-	-	1.35	-
Average Power	-	-	30	W CW
Operating Temperature Range	-20	-	+65	°C
Impedance	-	50	-	Ω
Finish	Nickel Plated			
Connectors	SMA-F			

OUTLINE DRAWING

- Dimensions in mm
- Direction: 1→2→3

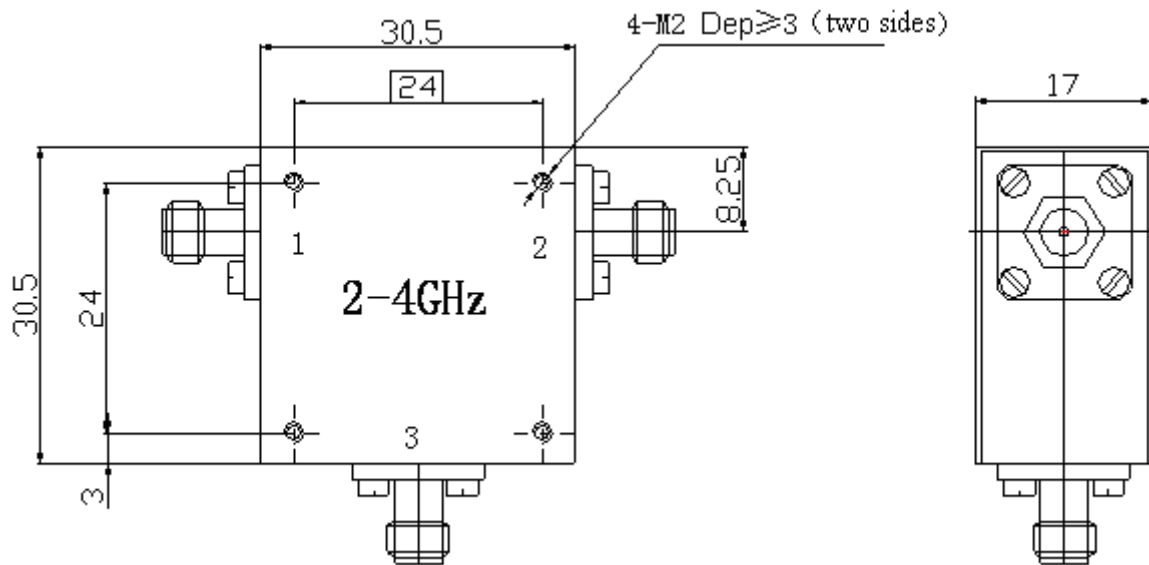

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com