



NEOTECH

GC0400.0800SF20

CIRCULATOR


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	4	-	8	GHz
Isolation	19	-	-	dB
Insertion Loss	-	-	0.5	dB
VSWR	-	-	1.3	-
Average Power	-	-	20	W CW
Operating Temperature Range	-30	-	+70	°C
Impedance	-	50	-	Ω
Finish	Nickle Plated			
Connectors	SMA-Female			

OUTLINE DRAWING

- Dimensions in mm
- Direction: 1→2→3

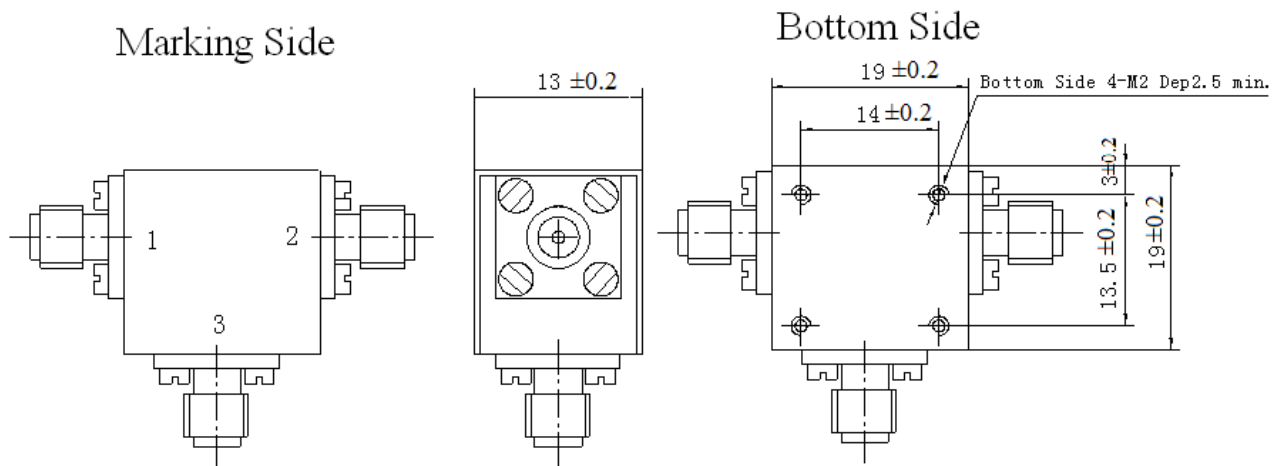

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com