



NEOTECH

GC1375.1450WR75

WAVEGUIDE CIRCULATOR


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	13.75	-	14.5	GHz
Insertion Loss	-	0.20	0.3	dB
Isolation	27	-	-	dB
VSWR	-	-	1.10:1	-
Average Power	-	-	40	W CW
Operating Temperature Range	-25	-	55	°C
External Finish	Anodine			

OUTLINE DRAWING

- Dimensions in mm
- Waveguide: WR75

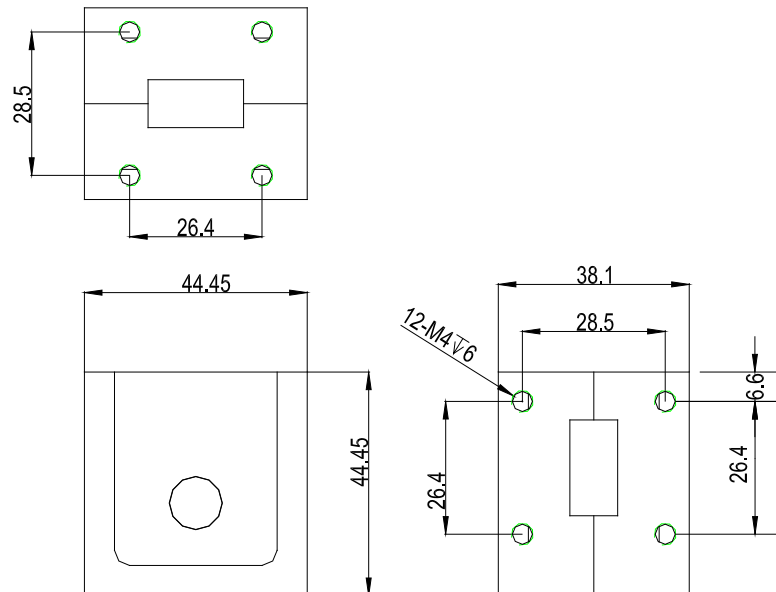

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com