



NEOTECH

GPD054.059SF20

2- WAYS POWER DIVIDER


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	5.4	-	5.9	GHz
Isolation	20	-	-	dB
Insertion Loss	-	-	0.6	dB
VSWR Input	-	-	1.3	-
VSWR Output	-	-	1.2	-
Phase Unbalance	-	-	± 4	$^{\circ}$
Amplitude Unbalance	-	-	± 0.3	dB
Forward Power	-	-	20	W cw
Reverse Power	-	-	2	W cw
Operating Temperature Range	-40	-	+70	$^{\circ}\text{C}$
Impedance	-	50	-	Ω
Finish	Gray Paint			
Connectors	SMA-F			

OUTLINE DRAWING

- Dimensions in mm

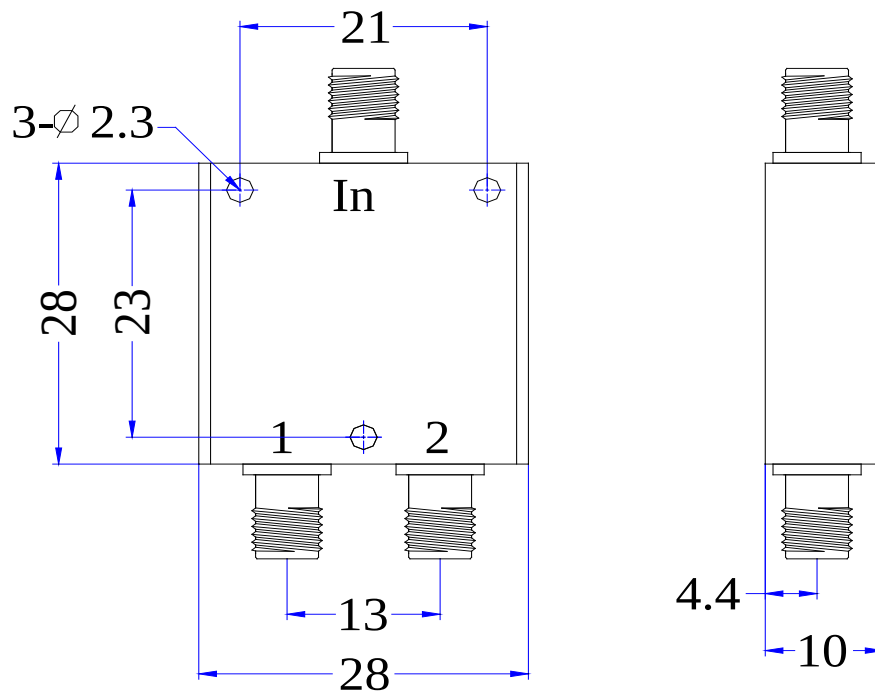

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com