



NEOTECH

NBPF2750.2760WR28

BANDPASS FILTER


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	27.5	-	27.6	GHz
Insertion Loss	-	1.3	1.5	dB
Return Loss	18	-	-	dB
Rejection at DC-26.5 GHz	70	-	-	dB
Rejection at 28.5-38GHz	50	-	-	dB
Rejection at 38-40GHz (estimated value)	30	-	-	dB
Opererating Temperature	-40	-	+60	°C
Connector	WR28 (UBR320)			

OUTLINE DRAWING

- All dimensions in mm

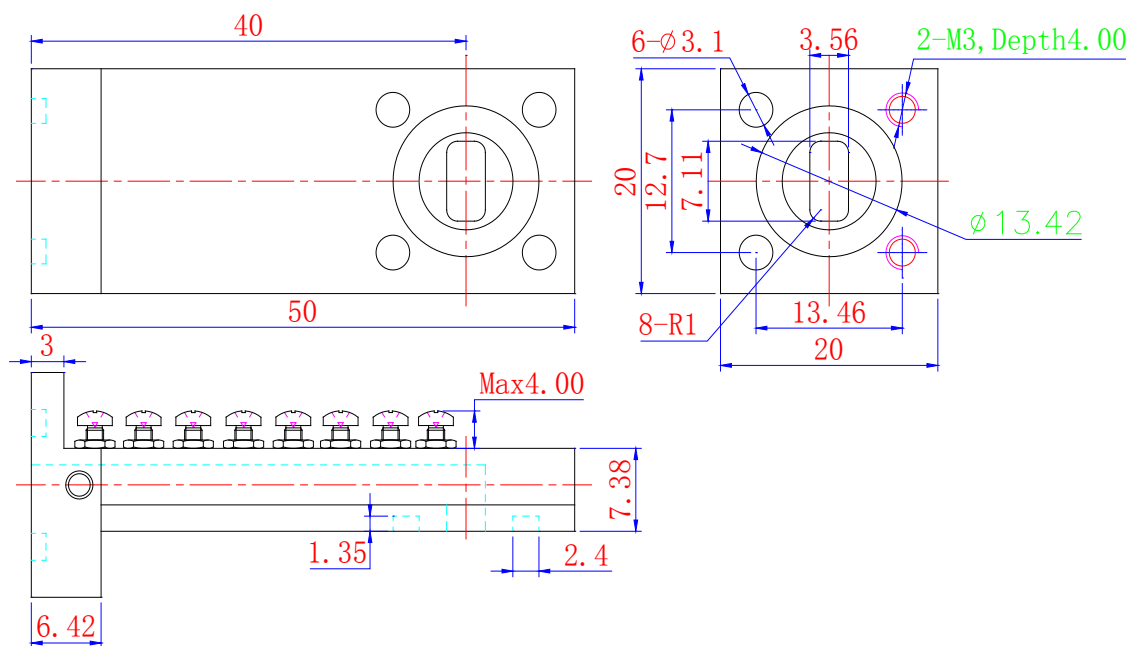

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com