



NEOTECH

G2PD0050.1800SF20

2-WAYS POWER DIVIDER


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	0.5	-	18	GHz
Insertion Loss	-	-	1.7	dB
VSWR	-	-	1.8	-
Isolation	16	-	-	dB
Phase Unbalance	-	-	6	°
Amplitude Unbalance	-	-	0.4	dB
Input Power	-	-	20	W
Impedance	-	50	-	Ω
Connectors	SMA-Female			
Operating Temperature Range	-55	-	+85	°C

OUTLINE DRAWING

- Dimensions in mm

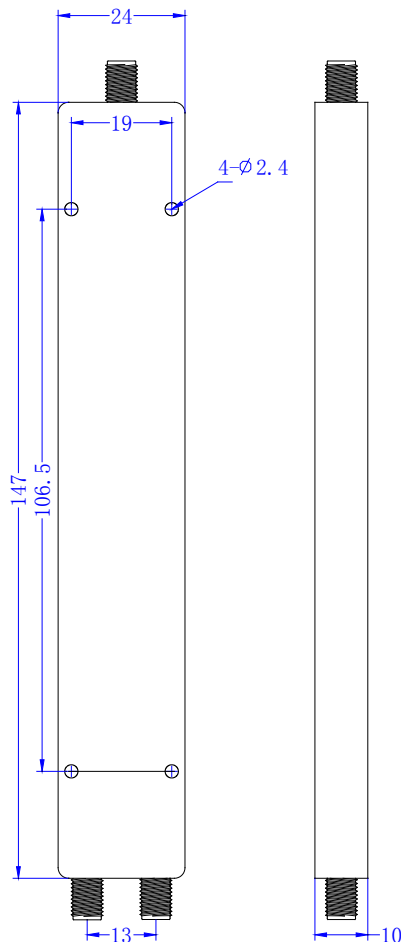

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com