




4-WAYS POWER DIVIDER

DATASHEET

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	1	-	2	GHz
Isolation	20	-	-	dB
Insertion Loss	-	-	0.8	dB
VSWR Input	-	-	1.4	-
VSWR Output	-	-	1.25	-
Phase Unbalance	-	-	±3	°
Amplitude Unbalance	-	-	±0.3	dB
Forward Power	-	-	45	dBm
Operating Temperature Range	-20	-	+60	°C
Impedance	-	50	-	Ω
Finish	Gray Paint			
Connectors	SMA-Female			

- Dimensions in mm [inches]
- Tolerance: ± 0.5 [± 0.02]

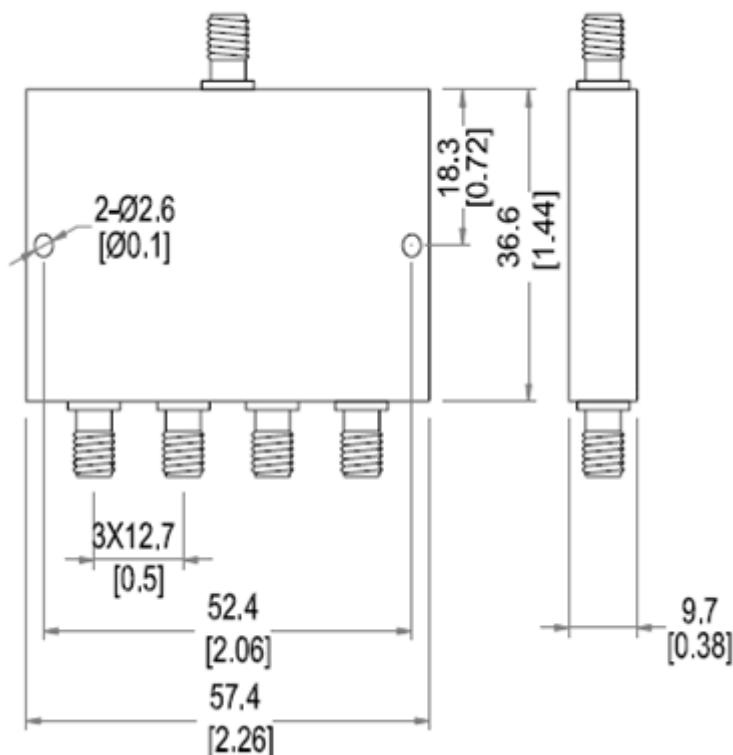

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com