



NEOTECH

GC0020.0040SF1

CIRCULATOR


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	200	-	400	MHz
Isolation (at Room Temperature)	17	-	-	dB
Isolation (at Full Temperatura Range)	15	-	-	dB
Insertion Loss (at Room Temperature)	-	-	1.0	dB
Insertion Loss (at Full Temperatura Range)	-	-	1.2	dB
Input VSWR (at Room Temperature)	-	-	1.40	-
Input VSWR (at Full Temperatura Range)	-	-	1.50	-
Average Power	-	-	10	W
Operating Temperature Range	-30	-	+85	°C
Impedance	-	50	-	Ω
Finish	Nickle Plated			
Connectors	SMA-F			

OUTLINE DRAWING

- All dimensions in mm
- Direction: P1→P2→P3

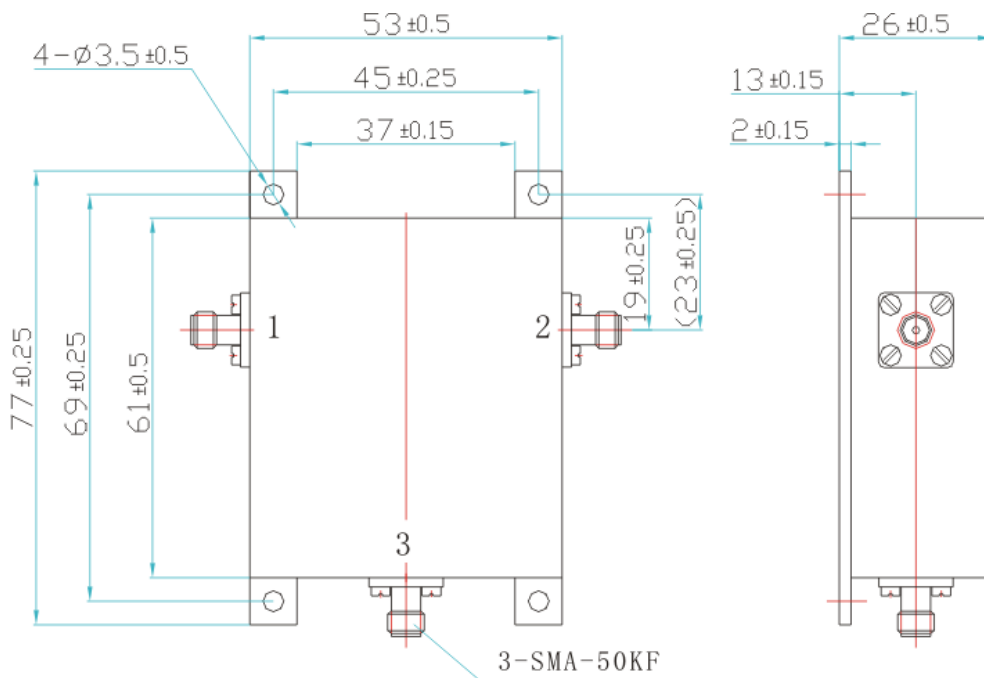

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com