



NEOTECH

GSP4T0025.0200ASF

SP4T SWITCH


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Type	Absorptive			
Frequency Range	250	-	2000	MHz
Isolation	60	-	-	dB
Insertion Loss	-	-	1.5	dB
VSWR	-	-	2.0	-
Switch Time	-	-	120	ns
No Damage Power	-	-	1	W
Operating Power	-	-	20	dBm
Power Supply	-	+5V / -5V	-	V
Control Logic	TTL, "0" → Low loss, "1" → Isolation, 3.6V < "1" < 5V			
Operating Temperature Range	-55	-	+85	°C
Finished	Laser Sealing			
Connectors	SMA-F			

OUTLINE DRAWING

- All dimensions in mm

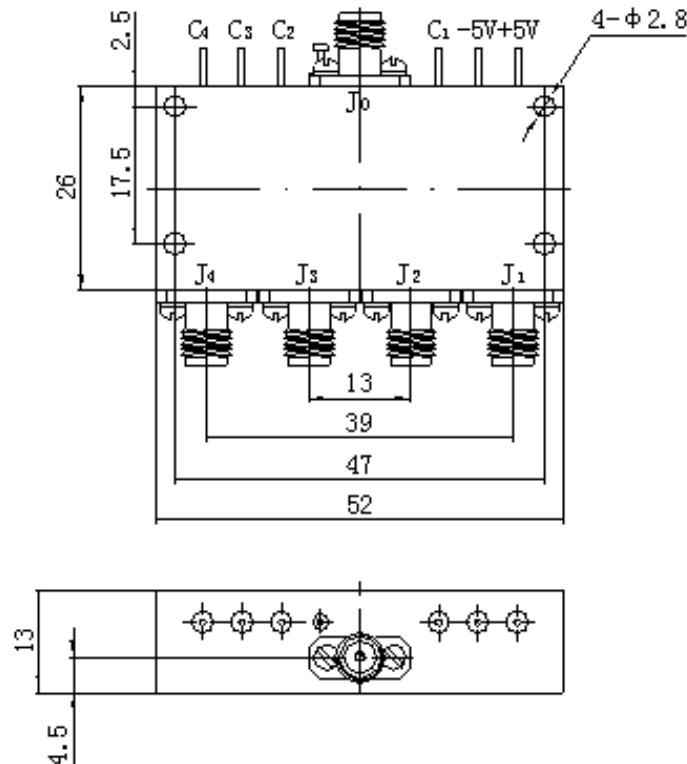

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com