



NEOTECH

GSP5T725.775RSF

SP5T SWITCH


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	7250	-	7750	MHz
Isolation	55	-	-	dB
Insertion Loss	-	-	2.0	dB
VSWR	-	-	1.5	-
Switch Time	-	-	200	ns
Operating Power	-	-	23	dBm
No Damage Power	-	-	1	W
Power Supply	-	+5/-12	-	V
Impedance	-	50	-	Ω
Operating Temperature Range	-55	-	+85	$^{\circ}\text{C}$
Control Logic	Programmed TTL, 2.4V < "1" < 5V, 0V < "1" < 0.8V			
Finished	Gold plated			
Input/Output Connector	SMA-F			

OUTLINE DRAWING

- All dimensions in mm

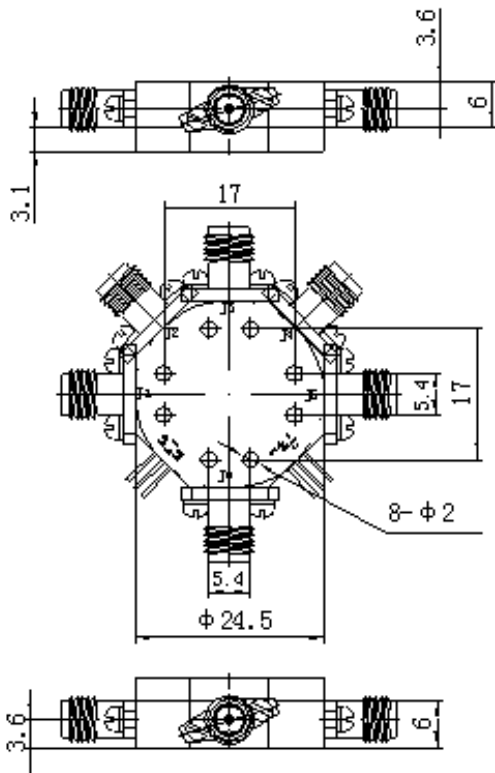

LOW PASS	A0	A1	A2	E
J1	1	0	0	1
J2	0	1	0	1
J3	1	1	0	1
J4	0	0	1	1
J5	1	0	1	1
ALL OFF	×	×	×	0

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com