



**NEOTECH**

# GT000300.716M50

TERMINATION


DATASHEET

## ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	DC	-	3.0	GHz
VSWR	-	-	1.20:1	-
Power	-	-	50	W CW
Impedance	-	50	-	$\Omega$
Connector	7/16 (M)			
Environmental Conditions	IP65			
Body and Screw Cap	Brass nickel-plated			
Center Conductor	HPb-59 brass line, gold plated			
Heat Sink	Aluminum, Oxidation Treatment (Black)			

## OUTLINE DRAWING

- All dimensions in mm

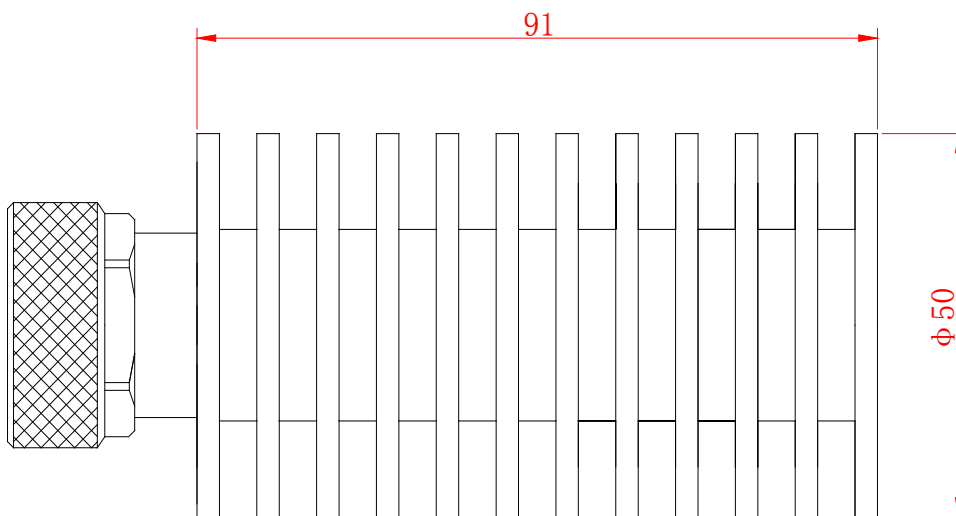

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at [info@myneotech.com](mailto:info@myneotech.com)