



NEOTECH

N180H0600.2650SF20

180° HYBRID

DATASHEET


ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Nominal Phase Shift	-	180	-	°
Frequency Range	6	-	26.5	GHz
VSWR	-	-	1.7	-
Insertion Loss (*)	-	-	1.8	dB
Amplitude Balance	-	-	±0.7	dB
Phase Balance	-	-	±11	°
Average Power	-	-	20	W
Isolation	14	-	-	dB
Connector Type	SMA-F			
Operating Temperature Range	-35	-	+105	°C
Storage Temperature Range	-55	-	+125	°C

(*)The above insertion loss value doesn't include the theoretic 3dB insertion loss.

OUTLINE DRAWING

- All dimensions in mm

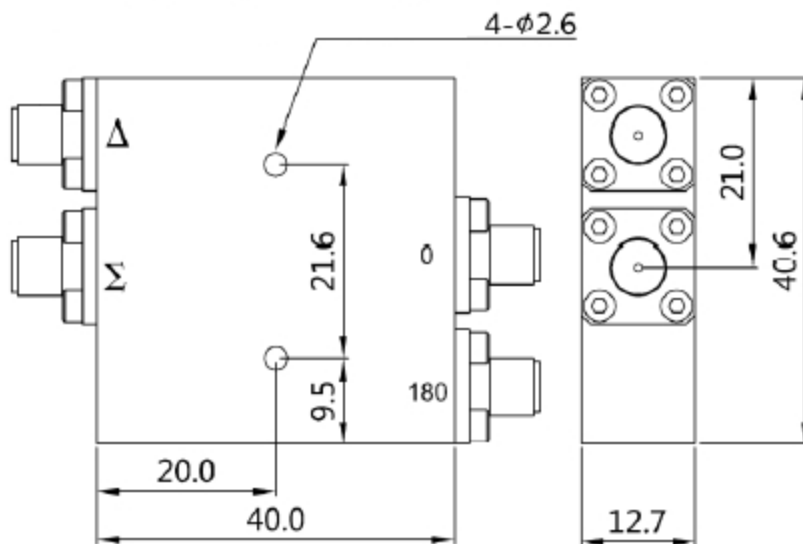

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com