



NEOTECH

T20ANLBNH

ATTENUATOR


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	DC	-	3	GHz
Attenuation	-	20	-	dB
Attenuation Accuracy	-	-	±0.8	dB
Flatness	-	-	0.8	dB
VSWR	-	-	1.2	-
Power Rate	-	-	40	W CW
Working Temperature Range	-30	-	+55	°C
Impedance	-	50	-	Ω
IP Grade	IP65			
Connectors	N(male)-N(female)			
RoHS Status	RoHS Compliant			

OUTLINE DRAWING

- All dimensions in mm

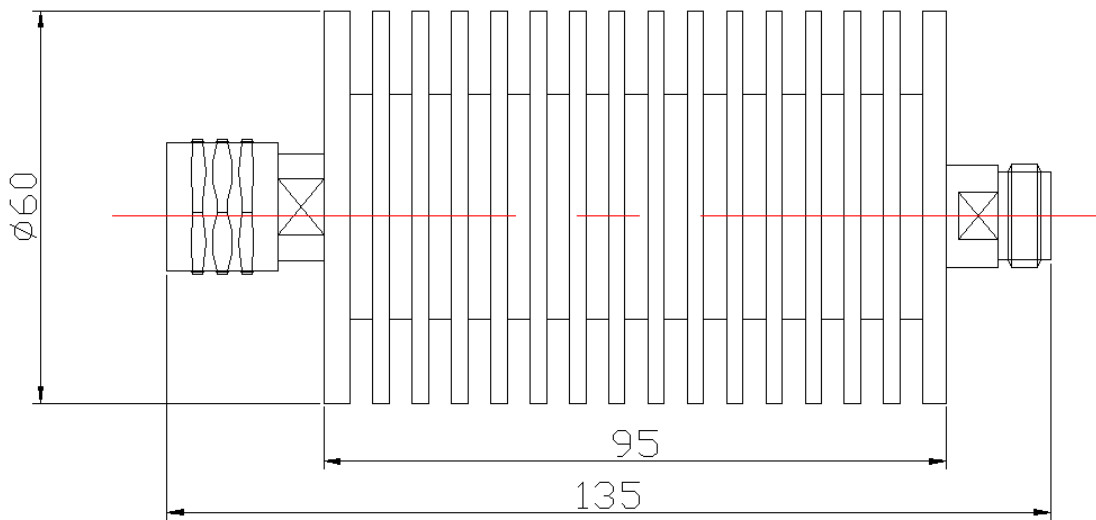

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com