



NEOTECH

N10DC0100.2000SF20

DIRECTIONAL COUPLER

DATASHEET


ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	1		20	GHz
Coupling Value	-	10±0.5	-	dB
Frequency Flatness	-	-	±0.5	dB
VSWR	-	-	1.50	-
Insertion Loss	-	-	1.4	dB
Directivity	15	-	-	dB
Average Power	-	-	20	W
Connector	SMA-Female			
Typical Operating Temperature	-	+25	-	°C
Operating Temperature Range	-35	-	+105	°C
Storage Temperature Range	-55	-	+125	°C

OUTLINE DRAWING

Dimensions in mm

Dimensions Tolerance: ±0.2mm

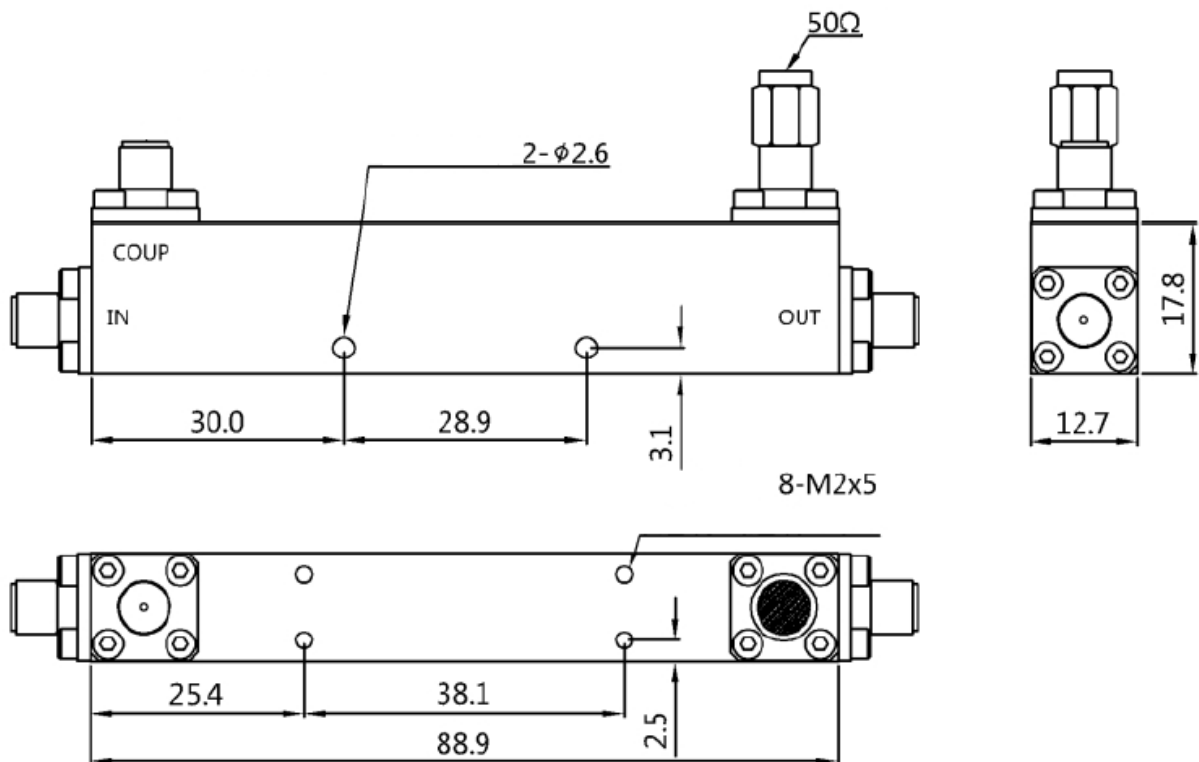

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com