



NEOTECH

GPD040.120SF10

3-WAYS POWER DIVIDER


DATASHEET

ELECTRICAL SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	4	-	12	GHz
Isolation	18	-	-	dB
Insertion Loss	-	-	1.0	dB
VSWR Input	-	-	1.5	-
VSWR Output	-	-	1.3	-
Phase Unbalance	-	-	±5	°
Amplitude Unbalance	-	-	0.5	dB
Forward Power	-	-	10	W CW
Reverse Power	-	-	2	W CW
Temperature Range	-45	-	+85	°C
Impedance	-	50	-	Ω
Finished	Gray Paint			
Connectors	SMA-F			

OUTLINE DRAWING

- Dimensions in mm

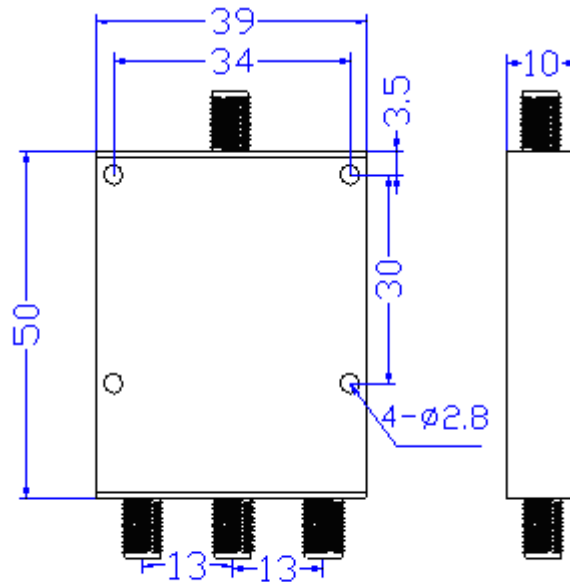

www.myneotech.com

Rev.	Description	Date	Approved by

For more information, please contact us at info@myneotech.com